


D2866

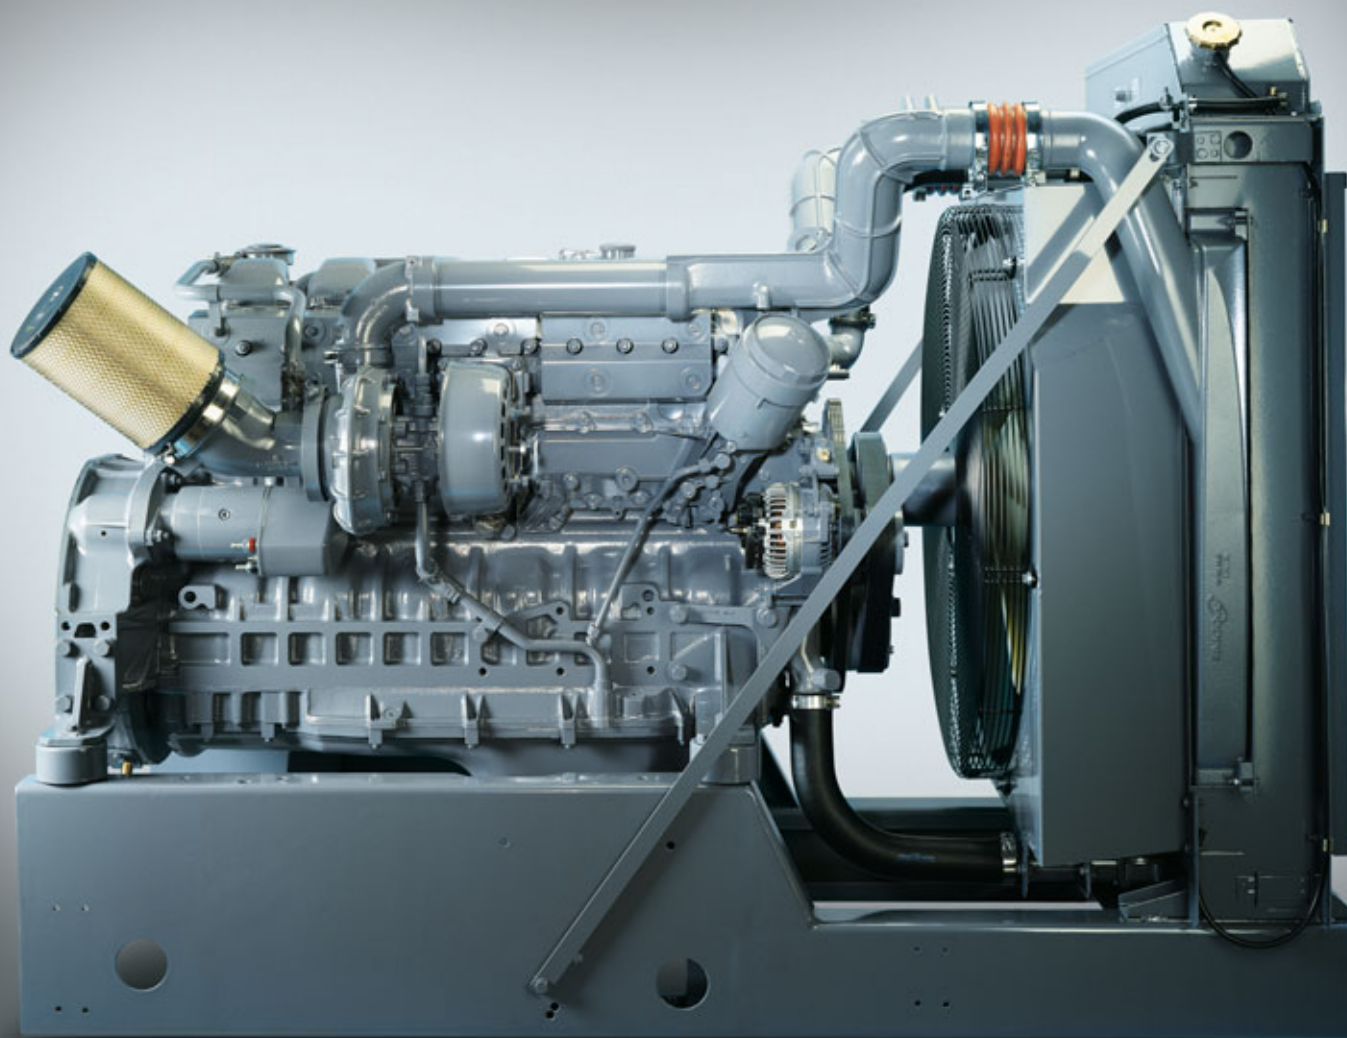

6-cylinder diesel engine for power generation.

Engineering the Future – since 1758.

MAN Nutzfahrzeuge



What turns the night into day?

MAN diesel power units are built to satisfy the exact demands of power generation. Rated in the emergency mode for maximum electrical power output (LTP), the power units feature dependable and rapid load acceptance. In the prime power mode (PRP) the units exhibit exceptional endurance with an average operational performance of about 4,000 h/a. Backed by absolute reliability, consistent power availability and exemplary economy, MAN diesel power units qualify for almost unlimited power generation. And turning the night into day.



Engine Description D2866.

Characteristics

Cylinder and arrangement	6-cylinder in-line
Operation mode	4-stroke diesel engine with direct injection
Charging	Exhaust turbocharger with intercooler
Type of cooling	Water circulation by centrifugal pump on engine
Injection	Bosch in-line pump with integrated, electromagnetic actuator
Engine control	GAC-electronic control unit available in different variations

Dimensions D2866

A-Overall length with fan-cooled radiator	mm	1,965
B-Overall width with fan-cooled radiator	mm	1,200
C-Overall height with fan-cooled radiator	mm	1,748
D-Height from bottom of engine to crankshaft centre	mm	454
Weight (dry)	kg	1,180

Customer benefits

- High power ratings with environmentally-friendly operation
- Robust, compact design
- Fast response characteristic to load changes and safe handling of peak load
- Reliable operation and long lifetime
- High efficiency due to low fuel and lube oil consumption as well as low maintenance

Technical data D2866


Operation		LTP		PRP	
at speed	rpm	1,500 (50 Hz)	1,800 (60 Hz)	1,500 (50 Hz)	1,800 (60 Hz)
Type of engine		LE 203	LE 203	LE 201	LE 201
Bore	mm	128	128	128	128
Stroke	mm	155	155	155	155
Displacement	l	11.9	11.9	11.9	11.9
ISO fuel stop power IFN ¹	kW	360	400	-	-
Torque	Nm	2,292	2,122	-	-
ISO standard rating ICXN ²	kW	-	-	280	322
Torque	Nm	-	-	1,782	1,708
Genset rating net	kVA	410	450	310	350

¹ Continuous power for limited period without overload capability. ² Variable continuous power with 10% overload capability.

Definition of application

Engines for LTP (Limited Time Running Power) are designed for up to 300 annual operation hours at a load factor up to 100%. Normally the engines are used for emergency generating sets.

Engines for PRP (Prime Power) are designed for 4,000 annual operation hours at a load factor of 70%. These engines are used for peak-load operation.

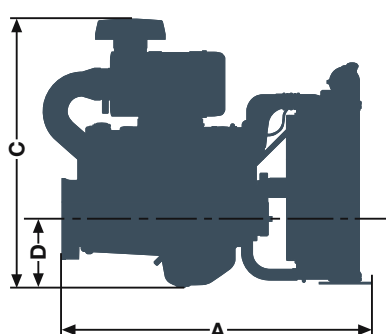

D 114.522/E · mu 09102 · Printed in Germany

Text and illustrations are not binding.

We reserve the right to make modifications in the course of technical progress.

MAN Nutzfahrzeuge AG
Sales Engines & Components
Vogelweiherstr. 33
90441 Nuremberg

man-engines@man.eu
www.man-engines.com

