

INSTRUCTION MANUAL



R/S/BV6/8M 358

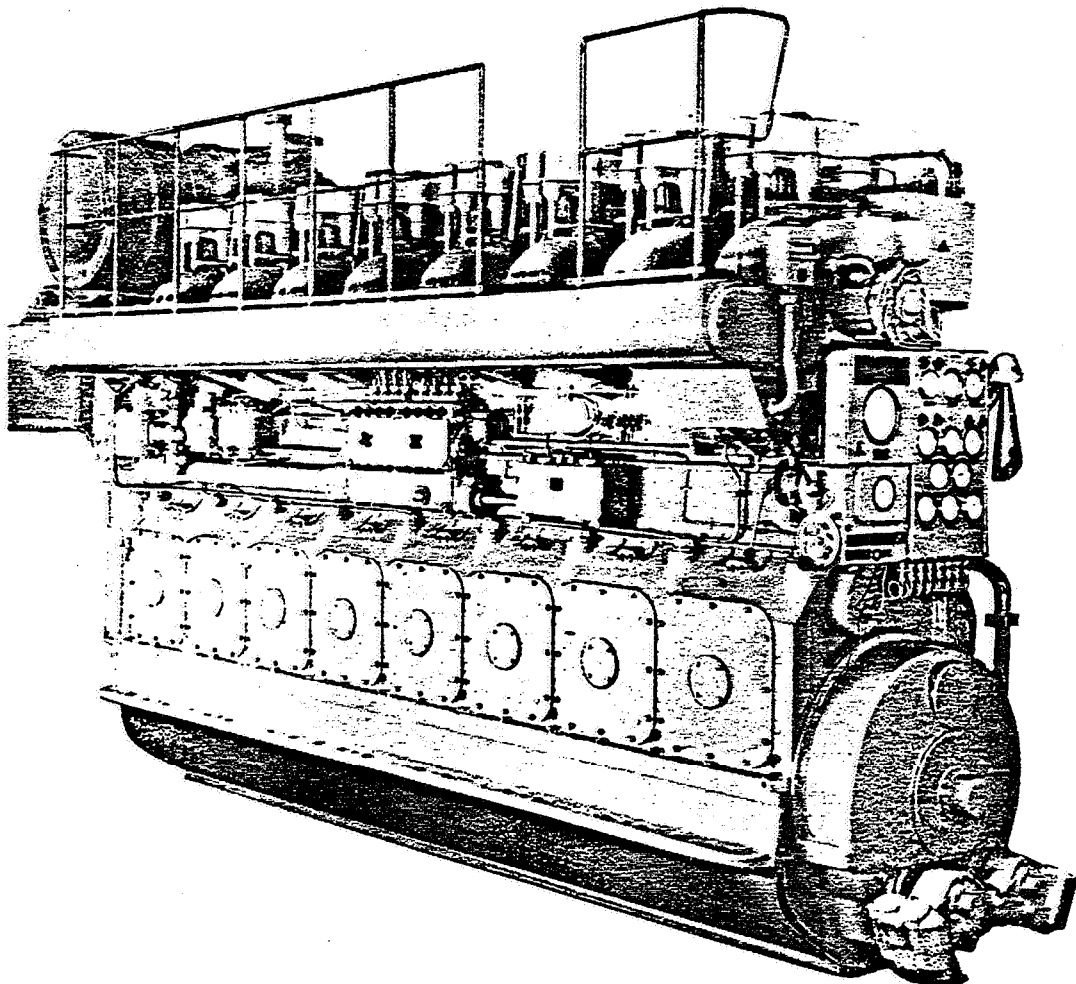

297 3385--0123-99

H 0123-1 E
6th Edition
Volume I

This book has been prepared for practical use and should therefore be made available to all personnel charged with operating and maintaining the plant supplied to you.

Without our specific approval, the contents of this book must not be reproduced or otherwise made available to third parties. They are subject to change without notice. However, Addendum or Replacement sheets may go forward to you in due course.

Your communications with the Klöckner-Humboldt-Deutz (KHD) Organization should please be addressed to the following :

KLÖCKNER-HUMBOLDT-DEUTZ AG

5 Köln 80

Post Box : 80 05 09

Telephone : Köln (0221) 8221

Telex : 0887 3201

Telegrams : Deutzmotor

For further copies of this book please contact our Dept. MMLV

The book has been edited by our Dept. AGO



KLÖCKNER-HUMBOLDT-DEUTZ AG · KÖLN

H 0123-1 E

1. GENERAL PARTICULARS

- 1.1 Description of Engine
- 1.2 Designation Details
 - 1.2.1 Model References
 - 1.2.2 Definitions of Engine Ends and Sides
 - 1.2.3 Numbering of Cylinders
 - 1.2.4 Engine Sections
- 1.3 Specification Data
 - 1.3.1 Principal Data
 - 1.3.2 Firing Order
 - 1.3.3 Valve Timing Data
 - 1.3.4 Fuel System Data
 - 1.3.5 Charge Air Cooler Data
 - 1.3.6 Injector Data
 - 1.3.7 Lube System Data
 - 1.3.8 Cylinder Lubricator Data
 - 1.3.9 Cooling System Data
 - 1.3.10 Pneumatic System Data
 - 1.3.11 Reference Dimensions and Clearances

2. OPERATING MEDIA (FUELS, LUBRICANTS, COOLANTS)

See attached Handbook

3. OPERATION OF ENGINE

- 3.1 Putting into Service
 - 3.1.1 Cleaning a New Engine
 - 3.1.1.1 External Cleaning
 - 3.1.1.2 Internal Cleaning
 - 3.1.2 Preparations for Starting
 - 3.1.2.1 Preparing the Fuel System
 - 3.1.2.2 Preparing the Lube System
 - 3.1.2.3 Preparing the Cooling System
 - 3.1.2.4 Preparing the Pneumatic System
 - 3.1.3 Starting the Engine
 - 3.1.3.1 Description of Starting Procedure
 - 3.1.3.2 Blow-off Valve on Starting Air Line



K L Ö C K N E R - H U M B O L D T - D E U T Z A G · K Ö L N

3.2 Attendance in Service

- 3.2.1 Attending to Speed
- 3.2.2 Attending to Fuel
- 3.2.3 Attending to Lubricant
- 3.2.4 Attending to Coolant
- 3.2.5 Attending to Exhaust Temperatures
- 3.2.6 Attending to Charge Air Temperature and Pressure
- 3.2.7 Reversing

3.3 Stopping the Engine

3.4 Schedule for Operating Run-in Engine

4. MAINTENANCE OF ENGINE

4.1 Maintenance before Starting

4.2 Periodical Maintenance (see also Maintenance Schedule)

- 4.2.1 Servicing the Filters
- 4.2.2 Servicing the Coolers
- 4.2.3 Servicing the Pneumatic System
- 4.2.4 Servicing the Exhaust System
 - 4.2.4.1 Inspecting the Manifold
 - 4.2.4.2 Inspecting the Pyrometer
- 4.2.5 Checking the Crankweb Deflection
- 4.2.6 Tightening Screwed Joints
 - 4.2.6.1 Tightening Mechanically
 - 4.2.6.2 Tightening Hydraulically

4.3 Maintenance Schedule

5. TROUBLES AND THEIR REMEDIES

- 5.1 General
- 5.2 Trouble Chart
- 5.3 Grinding Compounds



6. ENGINE MEDIA SYSTEMS

- 6.1 Low-pressure Fuel System
- 6.2 Injection System
- 6.3 Lube System
 - 6.3.1 System with High-level Tank
 - 6.3.2 System with Low-level Tank
- 6.4 Cooling System
- 6.5 Pneumatic System
 - 6.5.1 Description of Starting / Reversing System
 - 6.5.1.1 Air Flow Schedules for Air Flow Diagrams
 - 6.5.1.2 Legend for Air Flow Diagrams
 - 6.5.2 Air Flow Diagrams for LH Engine, CL Rotation
 - 6.5.3 Air Flow Diagrams for LH Engine, CCL Rotation

7. DESCRIPTION OF ASSEMBLY GROUPS



1. GENERAL PARTICULARS



KLÖCKNER-HUMBOLDT-DEUTZ AG · KÖLN

1. Description of Engine

1.1 Design

1.1.1 General Layout

The engine is a single-acting, turbocharged, water-cooled, four-stroke, trunk piston type with either six or eight cylinders arranged in-line. The engine can be furnished in a left-hand or right-hand version to suit the prevailing installation conditions. (When viewing towards the operating side, the flywheel is on the left for a left-hand engine and on the right for a right-hand engine).

1.1.2 Direction of Rotation

The engine can be furnished for counter-clockwise running, or for clockwise running, or for direct reversing.

A clockwise running engine is one whose flywheel revolves clockwise when the unit is viewed towards the timing case.

The opposite direction of rotation applies in the case of a counter-clockwise running unit.

In the case of reversible engines the nominal direction of rotation is the one which applies while running ahead.

1.1.3 Bedplate and Crankcase

The grey iron bedplate carries the crankshaft bearings and is connected to the crankcase by tie rods extending from the centre of the crankcase to below the main bearings.

The renewable, wet cylinder liners are inserted into the crankcase from the top. Each of the individual grey iron cylinders heads is attached to the crankcase by eight waisted anti-fatigue studs.

1.1.4 Crankshaft and Related Parts

The crankshaft is forged from open hearth steel and is supported in the bedplate by a main bearing adjacent to each throw ; locating bearing rings associated with the second main bearing from the flywheel end provide control of end float. The running surfaces of the main journals and crankpins are hard-chromed. The flangeless split main and big-end bearing shells are surfaced with a thin lead-bronze layer and a running-in layer of tin or lead-tin.

The connecting rods also are forged from open hearth steel . The big-end caps are attached by four anti-fatigue bolts.

1.1.5 Camshaft

The camshaft is carried in a trough cast integral with the top of the crankcase.

On reversible engines the camshaft is shifted endwise hydro-pneumatically.

1.1.6 Timing Gears

In the timing case at the flywheel end is the drive for the camshaft, injection pump, governor and centrifugal cooling water pump.



1.1.7 Starting System

The engine is started by compressed air via pneumatically controlled starting valves in the cylinder heads.

1.1.8 Injection System

The direct injection principle is employed. The system features a DEUTZ injection pump with helical-control ports, and multi-hole injectors in the cylinder heads. The combustion chamber is designed as a shallow cavity in the piston crown.

1.1.9 Governing System

Engine speed is controlled by a variable-speed governor acting on the control rod of the injection pump to control the volume of fuel injected.

1.1.10 Lubrication System

Apart from the regular circulatory lubrication system, the engine is equipped with an individual lubricator supplying fresh oil to the cylinders and, depending on the particular model, certain auxiliaries also.

1.1.11 Cooling System

Whereas boost air is cooled in an engine-mounted charge air cooler, both lube oil and closed-circuit water are cooled by raw water in separate heat exchangers.



1.2 Designation Details

1.2.1 Model Designation

The following models of the series 358 engines are available :

BVM - SBVM - RBVM 358

where the letter "B" refers to Büchi (turbocharging principle), "V" to Viertakt (four-stroke , high-rated), "M" to water-cooled version, "S" to Schiff (marine, uni-directional), "R" to reversible (marine, reversible), where the figure "3" is the design index and digits 58 indicate a piston stroke of 580 mm. In other words, the BVM is a stationary version and the SBVM and RBVM are marine versions of the 358 engine.

The figure between the letters "V" and "M" (e.g. RBV6M 538) indicates the number of cylinders provided.

1.2.2 Definitions of Sides and Ends

Operating side : Engine side mounting governor and injection pump


Exhaust side : Engine side mounting exhaust manifold

Flywheel end : Engine end mounting flywheel and timing chest (gear train)

Pump end : Engine end mounting lube oil pump and vibration damper

1.2.3 Numbering of Cylinders


The cylinders are consecutively numbered from the flywheel end.

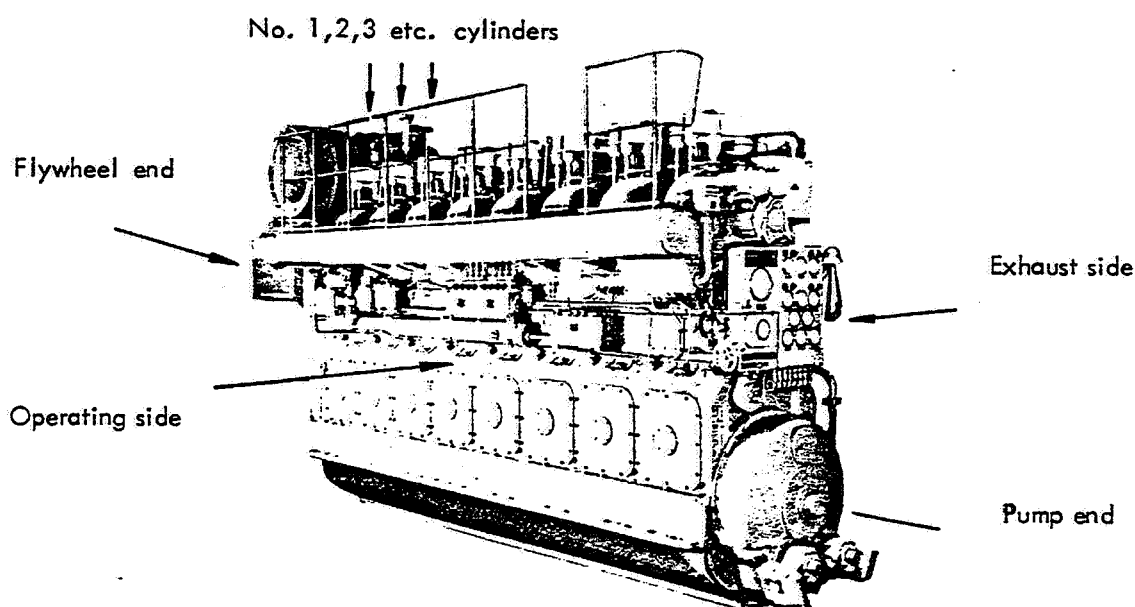


1.2.4 SECTIONS THROUGH ENGINE



Cross Section through BVM 358

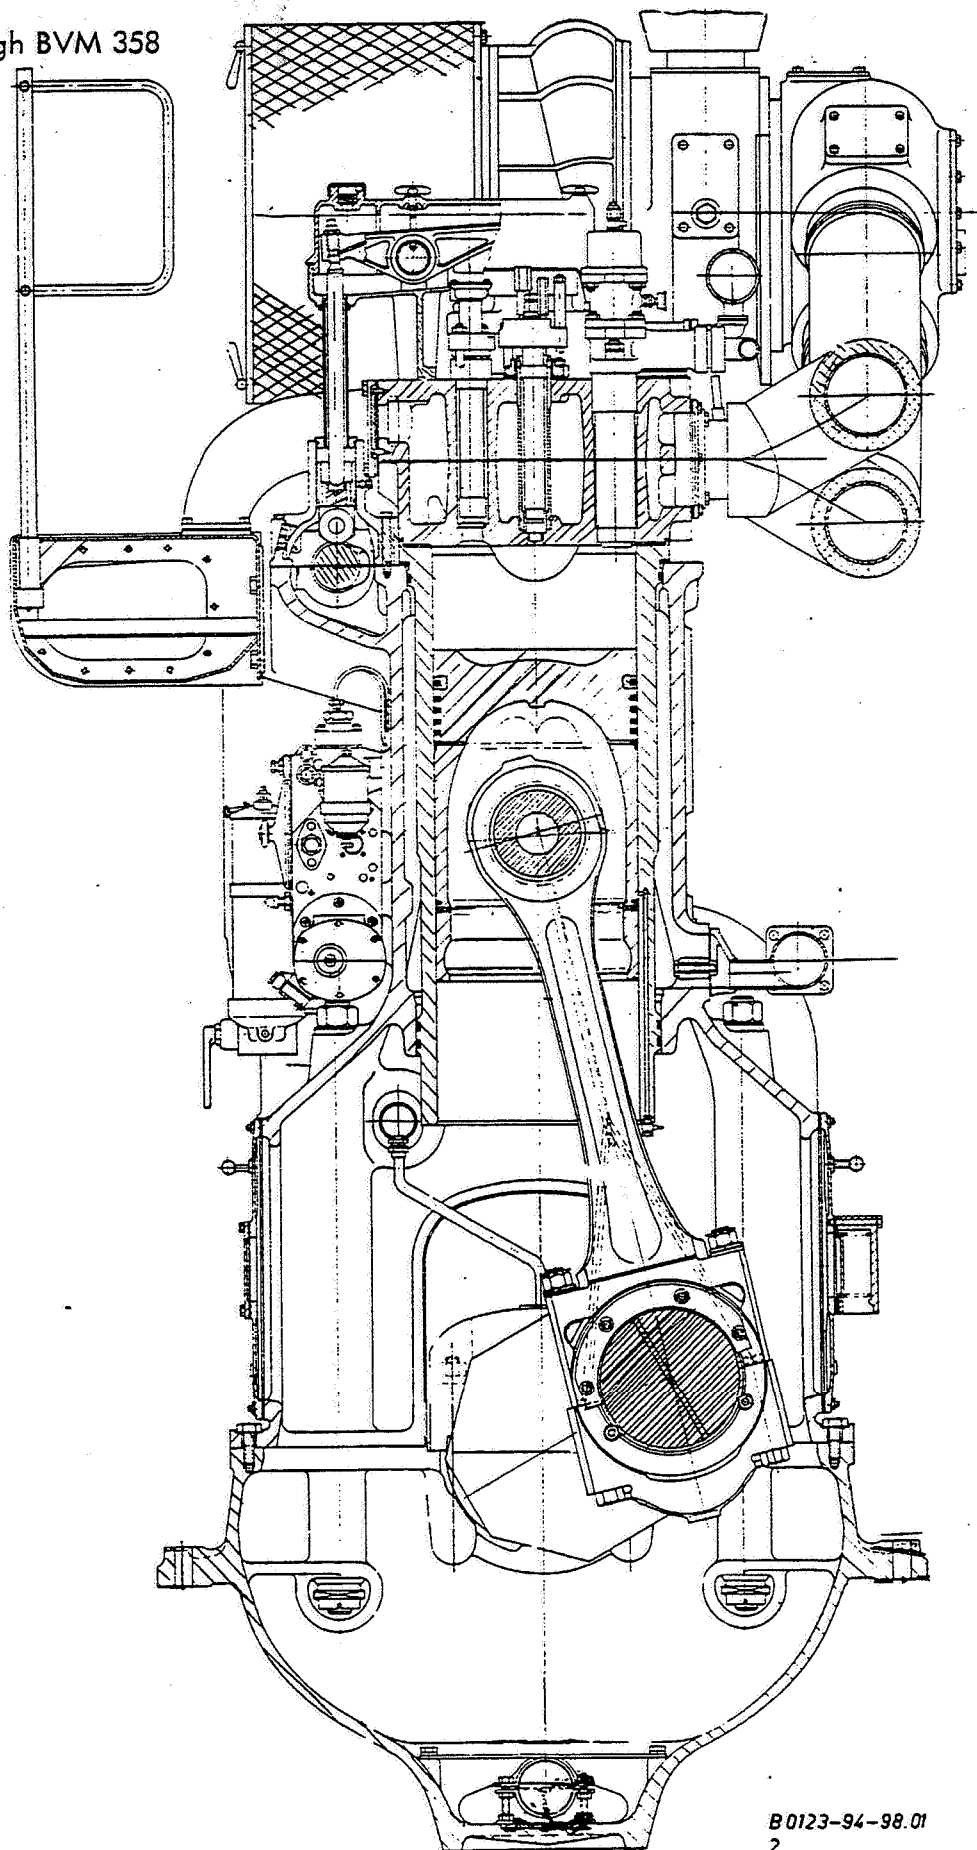

Longitudinal Section through BVM 358

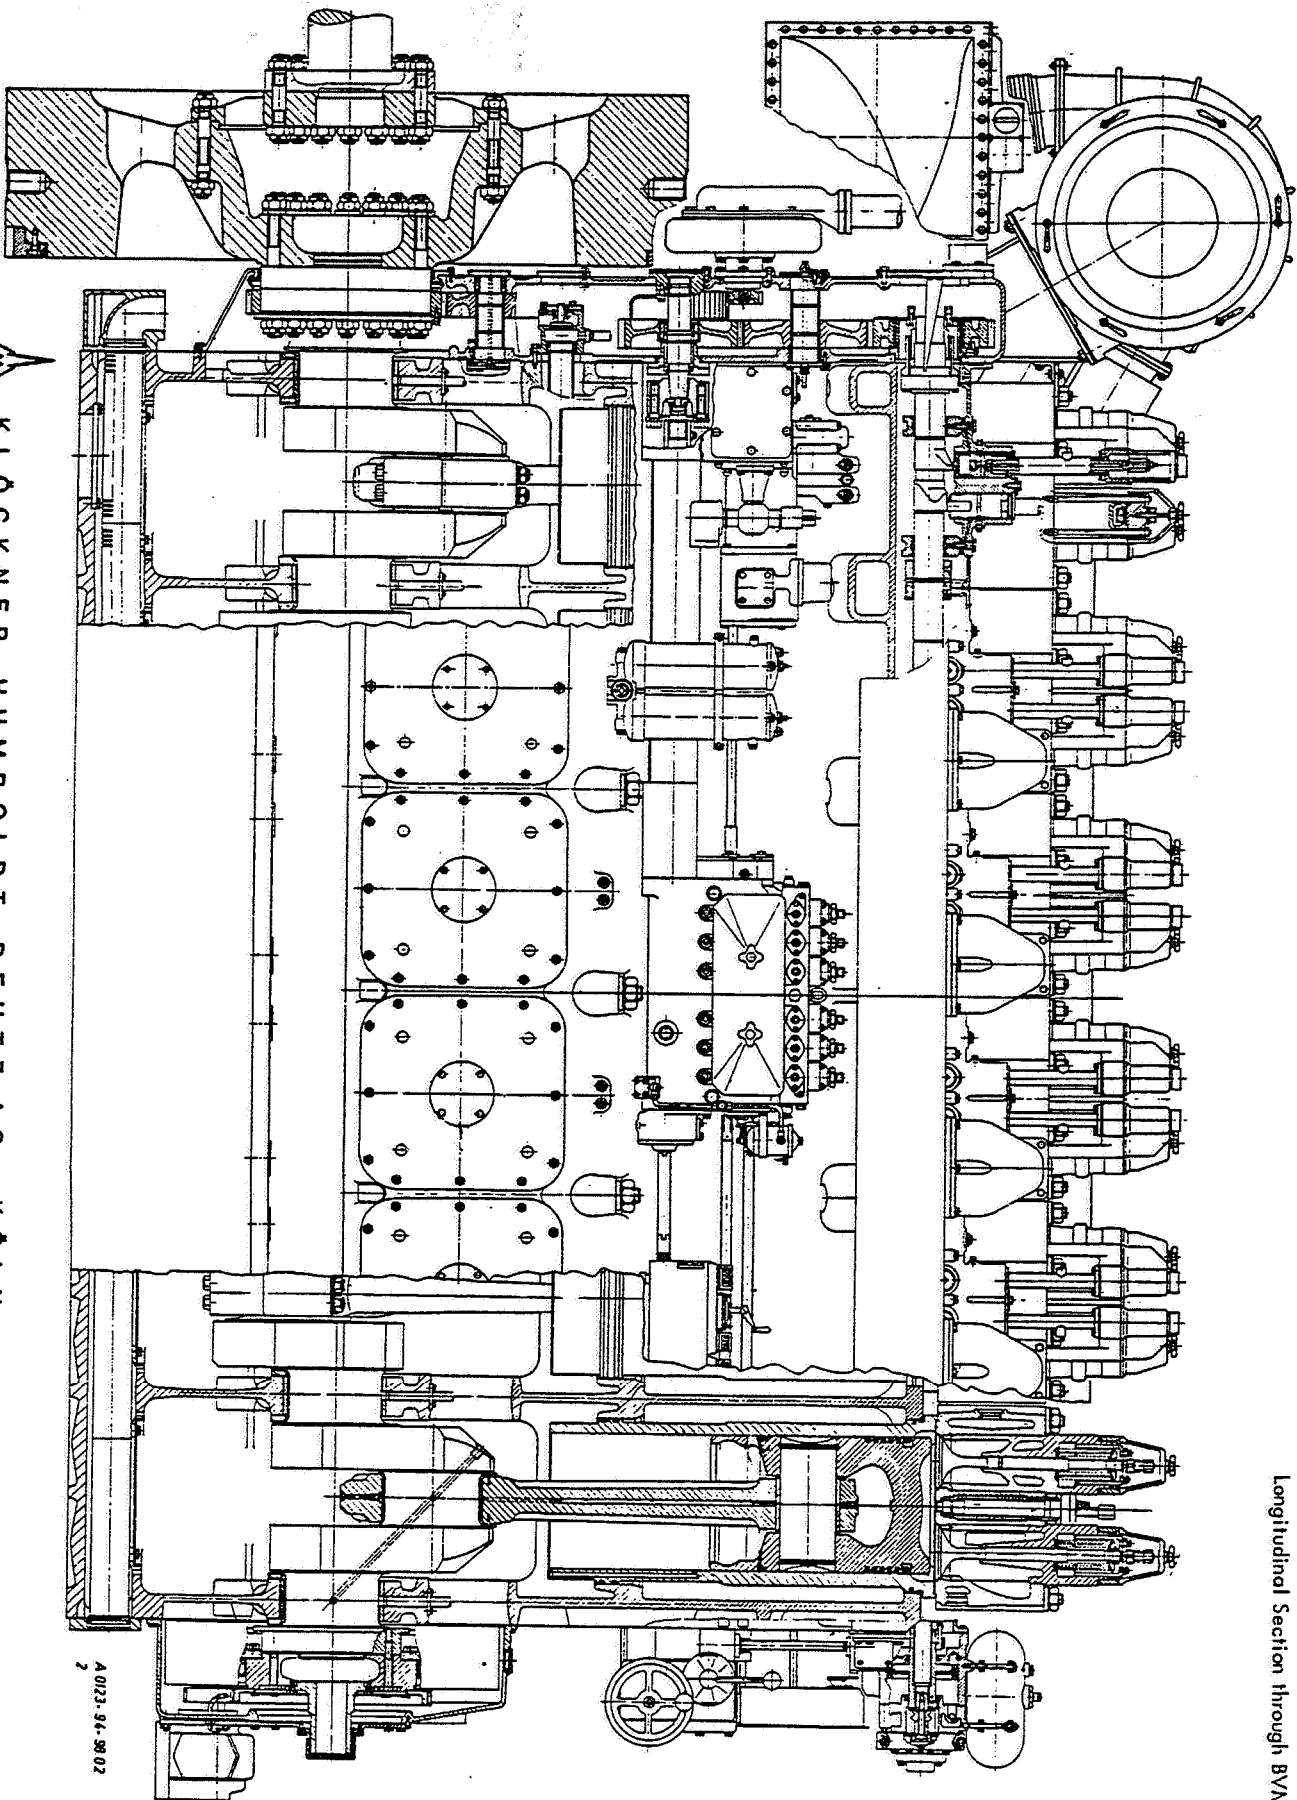

A 0123-96-8802
2



KLÖCKNER-HUMBOLDT-DEUTZ AG · KÖLN

1.3 Specification Data1.3.1 Principal Data

Power output and speed (see Acceptance Certificate)

Bore	400 mm (15-3/4 in.)
Stroke	580 mm (22-3/4 in.)
Piston displacement per cylinder	72.9 Litres
for 6 cylinders	437.4 Litres
for 8 cylinders	583.2 Litres
Compression ratio	12 : 1

1.3.2 Firing Order

(a) 6-cyl. engine, clockwise running	1-2-4-6-5-3
(b) " " " , counter-clockwise running	1-3-5-6-4-2
(c) 8-cyl. engine, clockwise running	1-3-5-7-8-6-4-2
(d) " " " , counter-clockwise running	1-2-4-6-8-7-5-3

1.3.3 Valve Timing

(in degrees of crank angle)

Exhaust valve opens	b. BDC
Exhaust valve closes	a. TDC
Inlet valve opens	b. TDC
Inlet valve closes	a. BDC

6-cyl.	8-cyl.
45°	45°
55°	75°
80°	75°
40°	40°

1.3.4 Fuel System Data

Opening pressure of injectors
 Max. fuel viscosity for injection
 Fuel pressure, before injection pump
 before filter

350 kp/cm²
 1.75° E
 1.8 - 2.5 kp/cm²
 3.5 kp/cm²

(connection for separate pumps)

Inlet temperature of injector coolant :

(a) water	60 ± 5° C
(b) gas oil	45 ± 5° C

Admissible deviation from mean value of cylinders

(a) ignition pressures	± 3 kp/cm ²
(b) exhaust temperatures	± 20° C

Sealing oil pressure in injection pump

3,0 - 5 kp/cm²

1.3.5 Charge Air Cooler Data

Charge air temperature :

- (a) recommended at engine inlet
 (b) maximum at cooler outlet (full load)
 (only temporarily)

$45 \pm 5^{\circ} \text{C}$
 see Acceptance Record

1.3.6 Injector Data (see also Groups 0119 and 0149)

Tests on the conical-seat injectors with the special testing outfit provided should give the following results :

1. At 20 kp/cm^2 below opening pressure applied during a period of 1 minute, there should be no dribbling from the nozzle tip.
2. When operating the pump lever in quick strokes there should be even fuel atomization again without dribbling.

1.3.7 Lube System Data

Oil pressure :

- (a) behind filter at rated speed (engine warm)
 (b) minimum at idling speed, approx.

 $2 - 3 \text{ kp/cm}^2$ 1.0 kp/cm^2

Oil temperature at engine inlet

 $10 - 60^{\circ} \text{C}$ **1.3.8 Cylinder Lubricator Setting Data (see also Group 0114)**

Delivery per outlet at 20 crank revolutions :

Cylinder

 $4.5 \text{ cm}^3 (0.27 \text{ in}^3)$

Injection pump

 $4.5 \text{ cm}^3 (0.27 \text{ in}^3)$

The transmission ratio of the lubricator drive should be set with eccentric (Assembly 0114) so as to give the following values :

Engine speed	Drive shaft speed
300 rev/min	$9 \pm 11.7^{+)} \text{ rev/min}$

Fresh Oil Consumption

in kg/h (lb/h)

Engine speed	6-cyl.	8-cyl.
300 rev/min	1.45 1.89 ^{+))} (3.2 4.2)	1.95 2.54 ^{+))} (4.3 5.6)



